



## FX 3000-IV Micro Switch adj

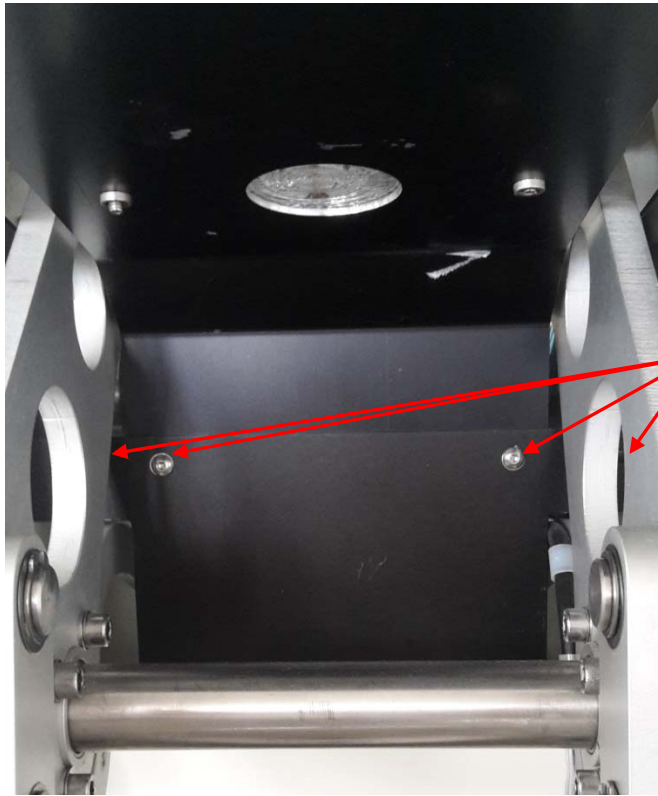

Remove this panel (4 screws)  
(it is easier when testhead is closed)

With these two screws you can adjust the position of the micro switches.

With the testhead closed loosen the two screws, just a bit, and slightly move up the switches, by reaching behind the metal bar, until you hear the "switching" from the micro switches.

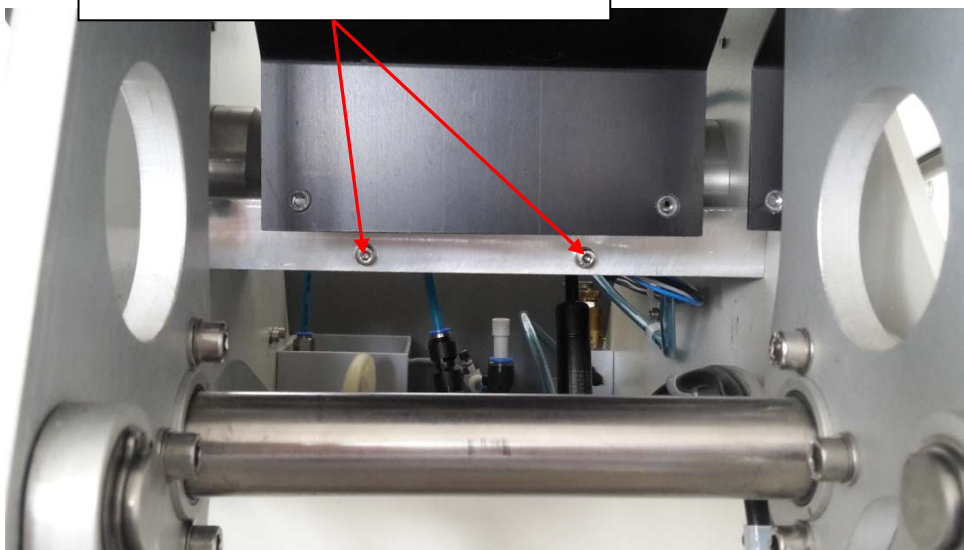

## FX 3000-IV Micro Switch adj

Mounting plate (Mirco Switches)

