


3000-IV USB-connection at main PCB

When installing the FX 3000-IV AUT Drop Detector, please make sure that the USB cable is connected to the upper USB-Port of the main PCB (see pictures below). The main PCB is located on the left side of the instrument. You can access the main PCB by removing the two front screws of the cover and lifting the cover at the front.



Main PCB, located at the left side of the instrument

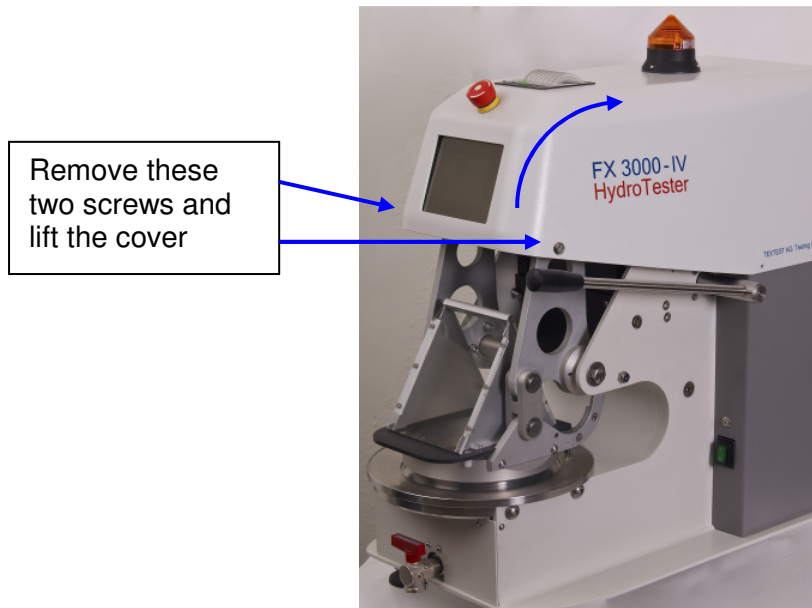