

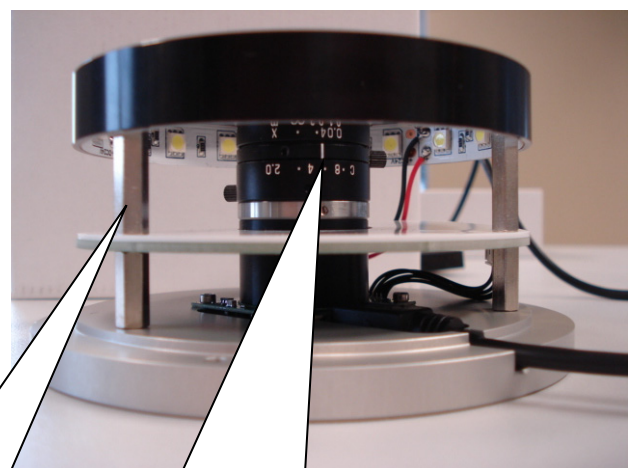
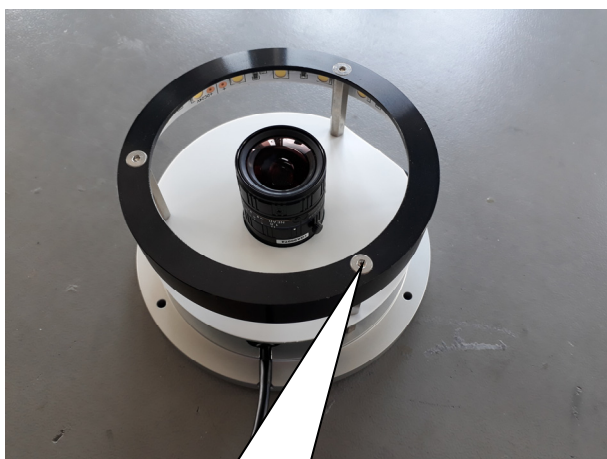



3000-IV AUT: Exchange USB-cable the Drop Detector

Disassemble the FX 3000-AUT in a clean environment (e.g. clean office etc.)

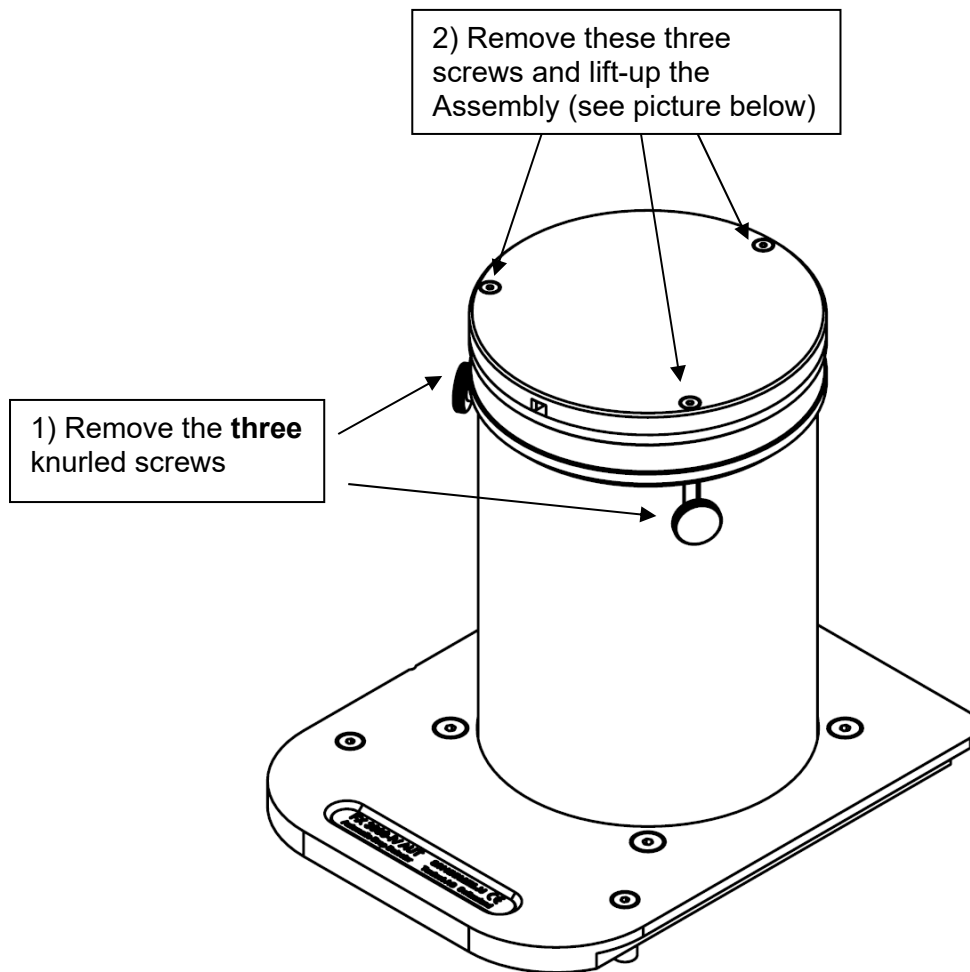

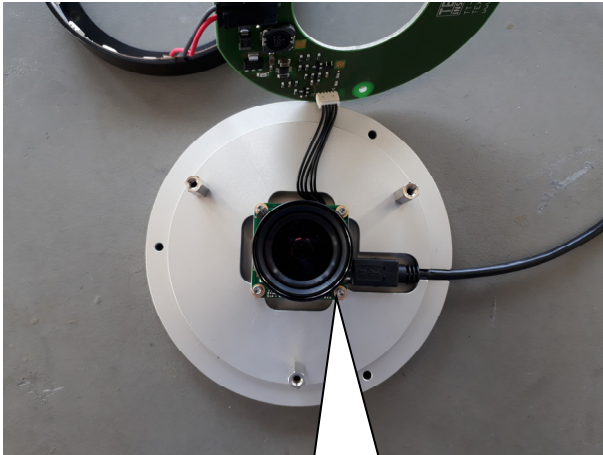

6) Remove the **two** screws

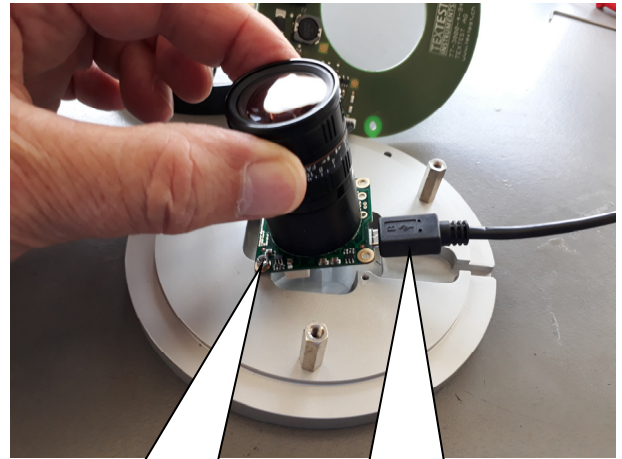

7) Loosen the **two** screws, just that the camera board can be tilted enough

8) Unplug the connector and exchange the cable